




BLTEK

POWERED BY:
XPCS
GROUP

2835 | 4.8W

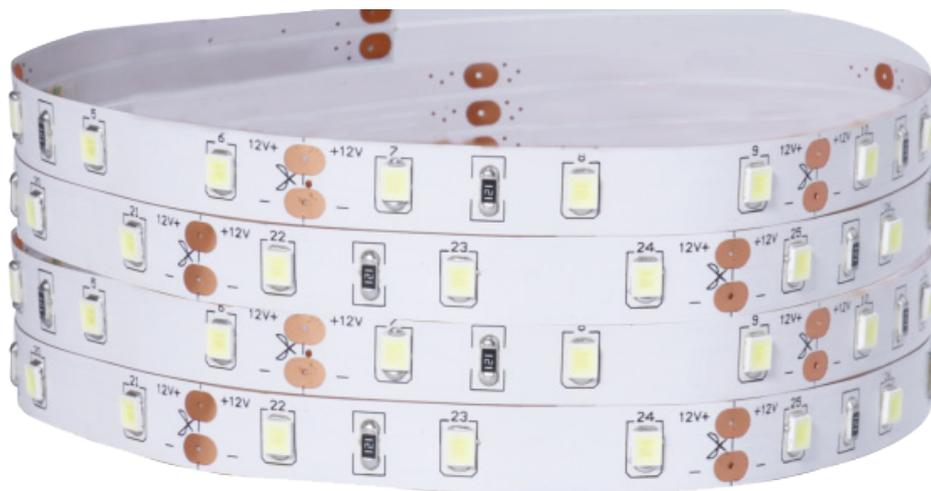

2835 | 4.8W | 3000K / 4000K / 6200K

Intensidade	Parâmetros Colorimétrico		Parâmetros Fotométricos / Radiométricos			Parâmetros Eléctricos		
	CCT	Render Index	Flux (lm)	Eff (lm/w)	Fe	V	I	P
3000K	3134K	88,0	487.1	109.8	1.2911	12.00	0.3696	4.4352
4000K	3891K	88,3	503.37	108.7	1.3872	12.00	0.3857	4.6284
6200K	6679K	90,4	504.31	114.2	2.0665	12.00	0.3680	4.416



3000K / 4000K / 6200K



500 lm/m



DC12V



4.8W/m



IP44



>80








60 Led/m



5x1mm

PERFIL DOS LEDS

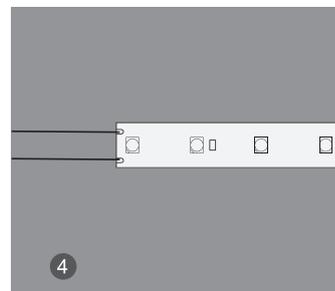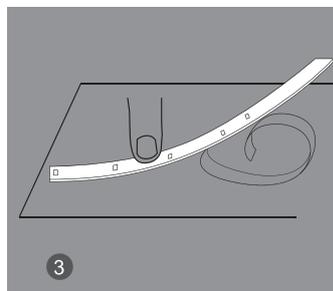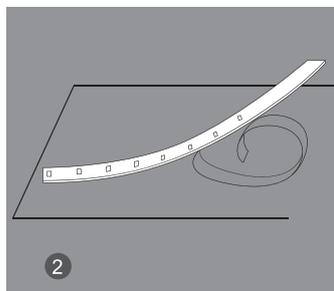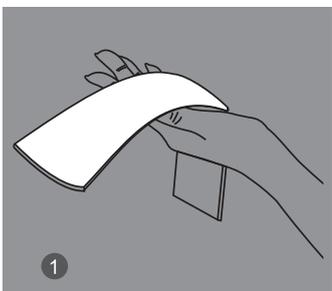

Não fazer pressão excessiva na superfície da fita de luz (vidro/painéis) de acrílico etc



Não cobrir a tira de Leds com nenhum material



Não ligar a tira de Leds quando enrolada na bobine.



Não forçar a tira de Leds em diâmetros inferiores a 3.8 milímetros



Não dobrar, vincar ou torcer, a tira de Leds.



Não forçar horizontalmente a tira de Leds.



BLTEK

POWERED BY:
XPCS
GROUP

Rua General Humberto Delgado, 161, 1dto | 4445-123 - Alfena - Portugal
Mail: xpcs.lda@gmail.com | www.xpcs.pt