




BLTEK

POWERED BY:
XPCS
GROUP

2835 | 9.6W

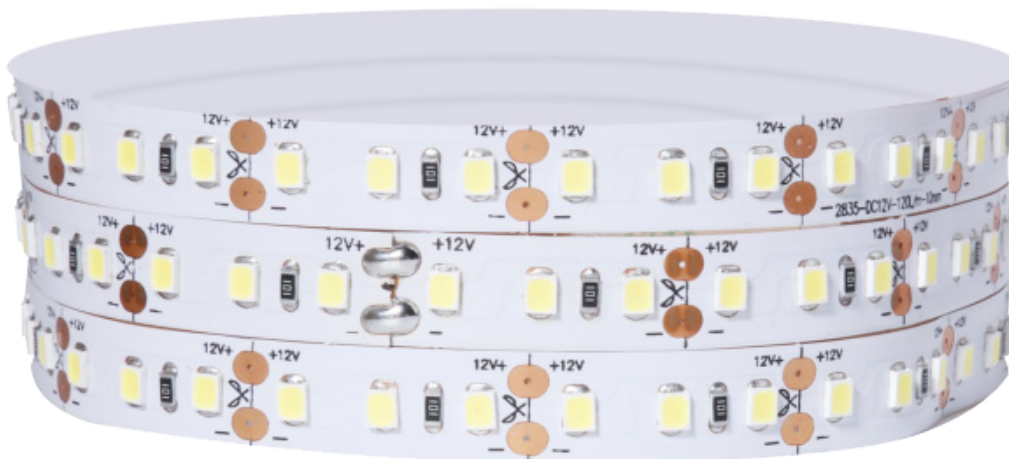

2835 | 9.6W | 3000K / 4000K / 6200K

	Parâmetros Colorimétrico		Parâmetros Fotométricos / Radiométricos			Parâmetros Eléctricos		
Intensidade	CCT	Render Index	Flux (lm)	Eff (lm/w)	Fe	V	I	P
3000K	3120K	87,9	920.68	105	3.7261	12.00	0.7307	8.76
4000K	3843K	88,1	928.9	102.3	2.1219	12.00	0.7567	9.0804
6200K	6639K	90,3	893.87	103	2.9525	12.10	0.7239	8.6868



3000K / 4000K / 6200K



915 lm/m



DC12V



9.6W/m



IP44



>80








120 Led/m




12x0.35mm


PERFIL DOS LEDS




Não fazer pressão excessiva na superfície da fita de luz (vidro/painéis) de acrílico etc




Não cobrir a tira de Leds com nenhum material




Não ligar a tira de Leds quando enrolada na bobine.



Não forçar a tira de Leds em diâmetros inferiores a 38 milímetros



Não dobrar, vincar ou torcer a tira de Leds.



Não forçar horizontalmente a tira de Leds.



BLTEK

POWERED BY:
XPCS
GROUP

Rua General Humberto Delgado, 161, 1dto | 4445-123 - Alfena - Portugal
Mail: xpcs.lda@gmail.com | www.xpcs.pt