



BLTEK


POWERED BY:
XPCS
GROUP

5050 | 7,2W



5050 | 7,2W | Dupla côr



Item No.	CCT	Length (mm)	LED QTY	LED	Power (W/m)	Input voltage (v)	Work in current (A/m)	lm/m	Beam angle (*)	IP	CRI	PF	Working temperature
CL-5050WWW060HY12-W10	2700	1000	60	5050	4+4	DC12V	0.67	300	120	IP44	80	/	-20~+45°C
	6500	1000	60	5050		DC12V		300	120	IP44	80	/	-20~+45°C

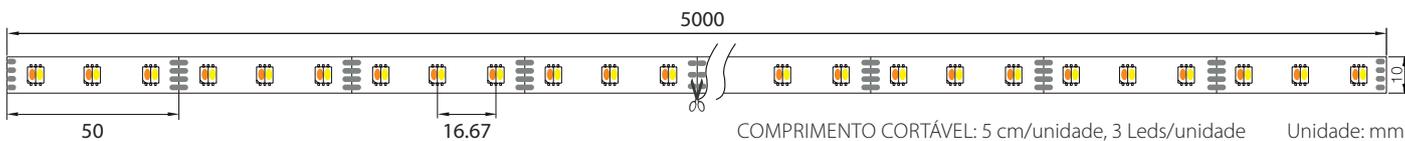

- 3000K / 4000K / 6200K
- 300 lm/m
- DC12V
- 7.2W/m

- IP44
- >80
- 60 Led/m
- 5x0.10mm

PERFIL DOS LEDS

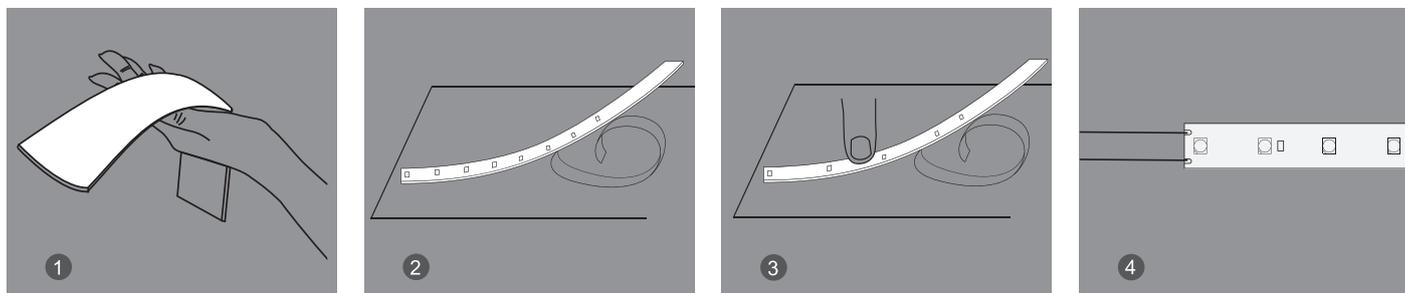

- Não fazer pressão excessiva na superfície da fita de luz (vidro/painéis) de acrílico etc
- Não cobrir a tira de Leds com nenhum material
- Não ligar a tira de Leds quando enrolada na bobine.
- Não forçar a tira de Leds em diâmetros inferiores a 38 milímetros
- Não dobrar, vincar ou torcer a tira de Leds.
- Não forçar horizontalmente a tira de Leds.



BLTEK

POWERED BY:
XPCS
GROUP

Rua General Humberto Delgado, 161, 1dto | 4445-123 - Alfena - Portugal
Mail: xpcs.lda@gmail.com | www.xpcs.pt