




# BLTEK

POWERED BY:  
**XPCS**  
GROUP

DRIVER MODEL NO.

## R-240V

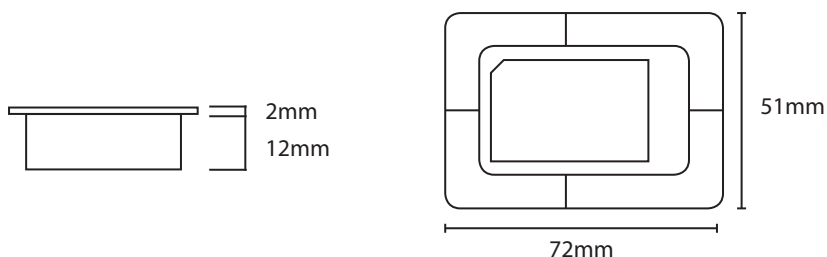

### DIMENSIONS

|             |       |
|-------------|-------|
| Width.....  | 135mm |
| Length..... | 58mm  |
| Height..... | 12mm  |

### RELIABLE TECHNICAL DATA

Relay system R-240V

Input voltage: DC12V

Safety According to EN 61347-2-13: 2014; EN 61347-1: 2015;

EMI According to EN 55015: 2013+A1: 2015;

EMS According to EN61547: 2009; EN61000-3-2: 2014; EN61000-3-3: 2013

Rohs According to IEC62321-7-2: 2017; IEC6232-4:2013; IEC62321-5: 2013; IEC6232-6: 2015

### INPUT CHARACTERISTICS

| INSPECTION ITEM  | REQUIRED VALUE | MEASURED VALUE | VERDICT |    |
|------------------|----------------|----------------|---------|----|
| Input voltage    | DC12V          | DC12V          | ■P      | □F |
| AC Input voltage | 110V~240V      | 110V~240V      | ■P      | □F |
| NO load power    | ≤1W            | 0.4W           | ■P      | □F |
| Control Current  | 80MA           | 30MA           | ■P      | □F |

### OUTPUT CHARACTERISTICS

| INSPECTION ITEM | REQUIRED VALUE                        | MEASURED VALUE                        | VERDICT |    |
|-----------------|---------------------------------------|---------------------------------------|---------|----|
| Output voltage  | 110V~230V                             | 110~230V                              | ■P      | □F |
| Max out power   | 500W(220-240V/AC)<br>300W(110-130/AC) | 500W(220-240V/AC)<br>300W(110-130/AC) | ■P      | □F |



**IP44 CE ErP RoHS REACH**



# BLTEK

POWERED BY:  
**XPCS**  
GROUP

Rua General Humberto Delgado, 161, 1dto | 4445-123 - Alfena - Portugal  
Mail: xpcs.lda@gmail.com | www.xpcs.pt